

LUMORA 60

SMART PROJECTOR



Ba11



User Manual

Designed For Excellence.

www.iball.co.in

Thank you for choosing **Lumora 60 Smart LED Projector**. Please read the user manual carefully before operation and save this user manual for further reference.

NOTE :

- Use the **supplied power cable** and connect the projector to an **AC 100—240 V, 50/60 Hz** power source.
- Do not look directly into the **projector lens** when the projector is turned on.
- Keep the **air vents clear and unobstructed** during use. Place the projector in a well-ventilated area.
- For safe operation and better performance, **turn off the projector after 6 hours of continuous use** and allow it to cool down.
- Keep the projector **away from water, moisture, and other liquids**. Do not place it in areas where water may collect.
- Place the projector on a **stable, flat surface** and avoid enclosed spaces that may restrict airflow.
- Please do not attempt to disassemble this product yourself, as it will result in voiding the warranty. For expert assistance, please contact our support team at 84400 45005 or feedback@iball.co.in

To review our complete warranty terms and conditions, please click the link below

[View Warranty Policy](#)

To find your nearest authorized service center, please click the link below

[Find a Service Center](#)

Features :

- 4500 Lumens
- FHD 1080p Support
- 381 cm Screen Size
- Auto Keystone Adaptation*
- App Support
- 50,000h LED Life Span
- 90° Tilt
- BT v5.4 | HDMI ARC | USB | Headphone Jack
- 2.4GHz + 5GHz WiFi
- Integrated Speakers
- Remote Control
- Quad Core Processor
- Matte Aluminum Enclosure
- Miracast | iOS Screen Mirroring
- Type-C Powered
- Compatible with Adapter/Power Bank (20V/2.5A)

Specifications :

Model	: iBall-LUMORA 60
Screen Size	: 76 - 381 cm
Native Resolution	: HD 720p
Max. Supported Resolution	: FHD 1080p
Android Version	: 14
Core Processor	: Quad Core Processor




Wi-Fi Connectivity	: 2.4GHz & 5GHz
BT Version	: v5.4
LED Life Span	: 50,000h
Brightness	: 4500 Lumens
Dynamic Contrast Ratio	: 2000:1
Projection Distance	: 1.5m - 5 m
Port Interface	: 1 x HDMI ARC 1 x USB 1 x Headphone Out
Video File Format	: H.265 H.264 VP9 AVS2 AVS AVS+ VP8 MPEG1 MPEG2 MPEG4 XVID H.263
Input Power	: DC 20V $\approx$ 2.5A
Product Dimension	: 19 x 9.6 cm (W x Dia)
Net. Weight	: 768 g


**Vertical Adjustment*

Package Contents :


Projector	: 1 U
Remote Control	: 1 U
Power Adapter	: 1 U
Cleaning Kit	: 1 U
HDMI Cable	: 1 U
QR Code Guide	: 1 U

Product Description :

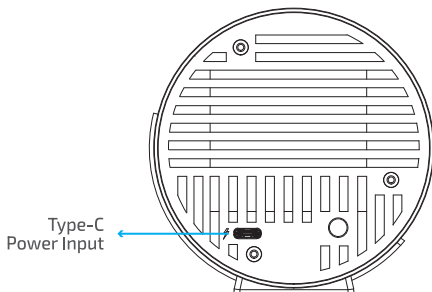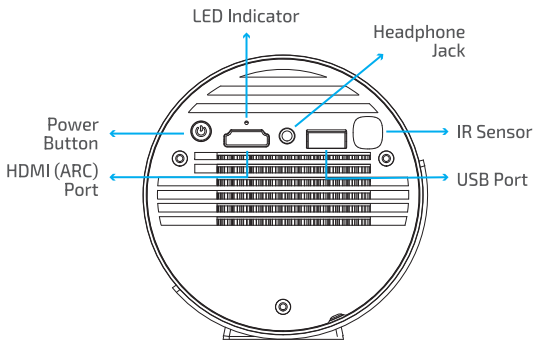

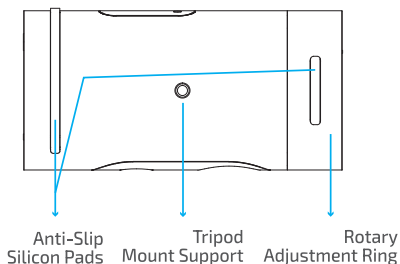


Remote Control :

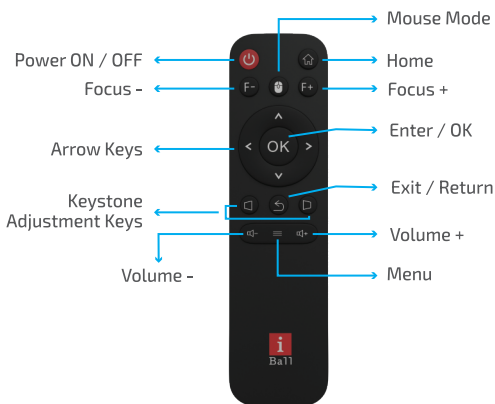

Projector Setup :

• Step 1

Connect the provided DC power adapter to the power supply and connect it to the projector's Type-C power input. Ensure the power supply is switched on after connecting.



- **Step 2**


Place the projector on a flat, stable surface. Press the Power button on the projector or the remote control to turn it on. The projector will start and display the Setup Wizard.

- **Step 3**

Position the projector so that it is directly facing the projection screen or wall for the best image quality.

- **Step 4**

Choose your preferred brightness level.

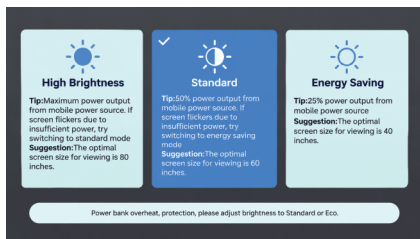


Projection Distance & Screen Size :


The recommended projection screen size is 76 - 381 cm for the best viewing experience, use the projector in a dark room.

Keystone Adjustment :


1. Go to Settings > Trapezoid Settings.

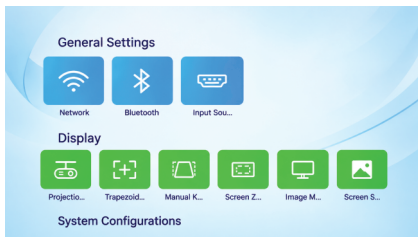

2. Turn on the toggle to enable Auto Keystone.

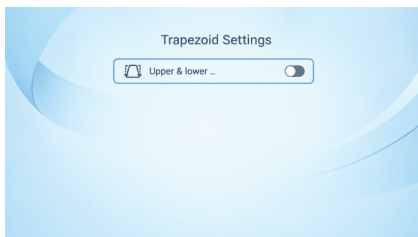


3. Go to Settings > Manual Keystone Correction.
4. Use the remote control to select Manual Keystone Correction, then adjust the four corners or sides of the projected image until it is properly aligned.

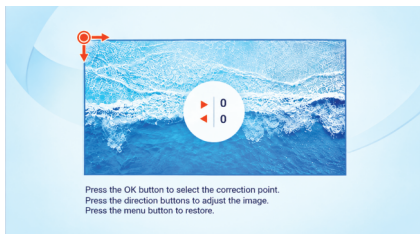

Projection Mode :


1. Go to Settings > Projection Mode.
2. Select the projection mode that matches your installation:
 - Desktop Front – Projector placed on a table in front of the screen.
 - Desktop Back – Projector placed behind the screen.
 - Ceiling Front – Projector mounted on the ceiling in front of the screen.
 - Ceiling Back – Projector mounted on the ceiling behind the screen.

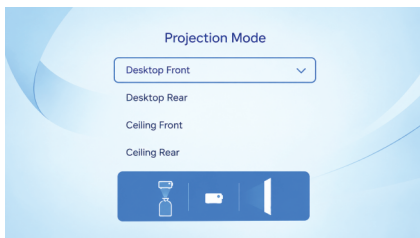

Android Home Screen :


The Home Screen provides quick access to:

- Wallpaper
- Source
- Settings
- App Store
- Applications

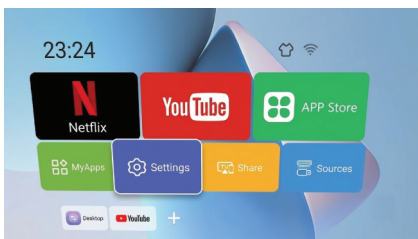

BT Speaker Mode :

1. Go to MyApps > BT Speaker Mode.
2. The projector's BT Device Name will be displayed as **"iBall Lumora 60"**.
3. Search for this device name on your phone or other BT device and connect to it.
4. Once connected, audio from the paired device will play through the projector speaker.

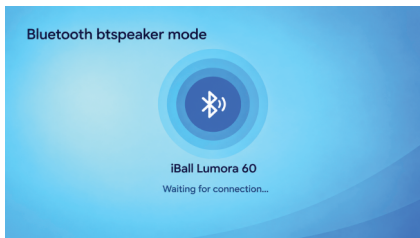


HDMI :

1. Connect an HDMI device to the projector using an HDMI cable.
2. Go to Source and select HDMI as the input source.
3. The content from the connected device will be displayed on the projector.

BT Settings :

1. Go to Settings > BT.
2. Turn BT On and search for nearby BT devices.
3. Select the desired BT device to pair and connect.

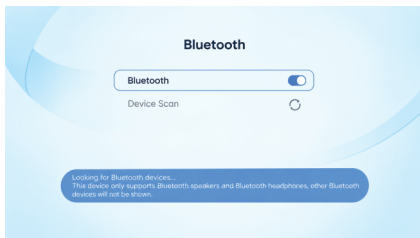


File Manager :

Use the File Manager to view and access files stored on external storage devices, such as USB drives.

Network Settings :

1. Go to Settings > Network.
2. Select the desired Wi-Fi network from the available list.
3. If the network is password-protected, enter the password to connect.

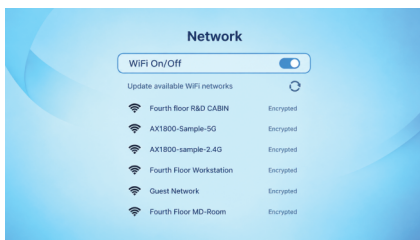

Screen Zoom :

1. Go to Settings > Screen Zoom.
2. Adjust the zoom to your preferred level using the remote.

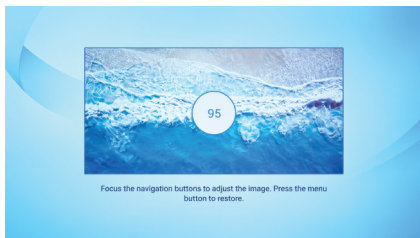


Image Mode :

1. Go to Settings > Image Mode.
2. Select your preferred mode from the available options.



Open My Apps :

From the Home Screen, press the Down Button to open My Apps.



ISO 9001:2015 Certified Company
Since 2001 | www.iball.co.in