

CLICKSET SB1000

Wireless Keyboard & Mouse Combo



Ba11



User Manual

Designed For Excellence.

www.iball.co.in

Thank you for choosing **iBall ClickSet SB1000 Wireless Keyboard & Mouse Combo**. Please read the user manual carefully before operation and save this user manual for further reference.

Note :

- *Please charge the product with power adapter output rated voltage of DC 5V.*
- *Please do not attempt to disassemble this product yourself, as it will result in voiding the warranty. For expert assistance, please contact our support team at 84400 45005 or feedback@iball.co.in*

To review our complete warranty terms and conditions, please click the link below

[View Warranty Policy](#)

To find your nearest authorized service center, please click the link below

[Find a Service Center](#)

Features :

Keyboard :

- Full-size 109-Key Layout
- AI Quick Access Key
- 12 Media Keys
- WIN & MAC Modes
- Insta Calc
- Sleek Chiclet Keys
- 2-Level Retractable Stand
- ₹ Key Onboard
- UV Layered Keys

Mouse :

- 3800 DPI Switchable
- 4-Button Control
- Ambidextrous
- 5-Level DPI Shift
- High Precision

Specifications :

Keyboard :

Connectivity Interface	: 2.4GHz + 2BT
No. of Keys	: 109 Keys
Total No. of	
Multimedia Keys	: 12 (Integrated) 1 (Dedicated)

Keystrokes Life	: 8 Million Cycles
Wireless Range	: 10 meter (Without Obstacles)
Product Dimension	: 43.8 x 15 x 3 cm (W x D x H)
Net Weight	: 587 g

Mouse :


Resolution	: 1200 1600 2400 3200 3800 DPI
No. of Buttons	: 4 Buttons
Sensor	: Optical
Button life	: 3 Million Cycles
Wireless Range	: 10 meter (Without Obstacles)
Product Dimension	: 6.2 x 11.2 x 3.9 cm (W x D x H)
Net Weight	: 71 g

Package Contents :

Keyboard	: 1 U
Mouse	: 1 U
USB Receiver	: 1 U
Charging Cable	: 1 U
QR Code Guide	: 1 U


Product Descriptions :

Keyboard :

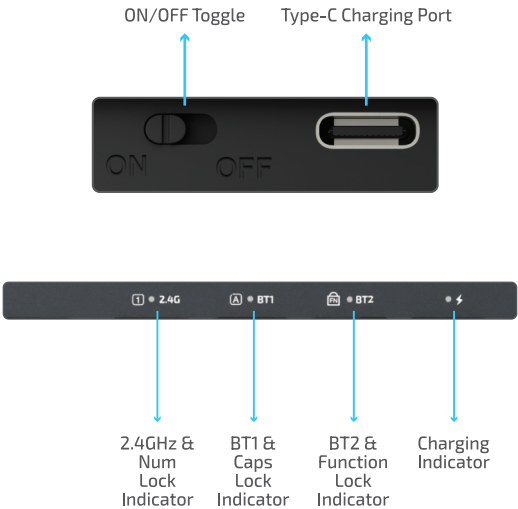

Mouse :



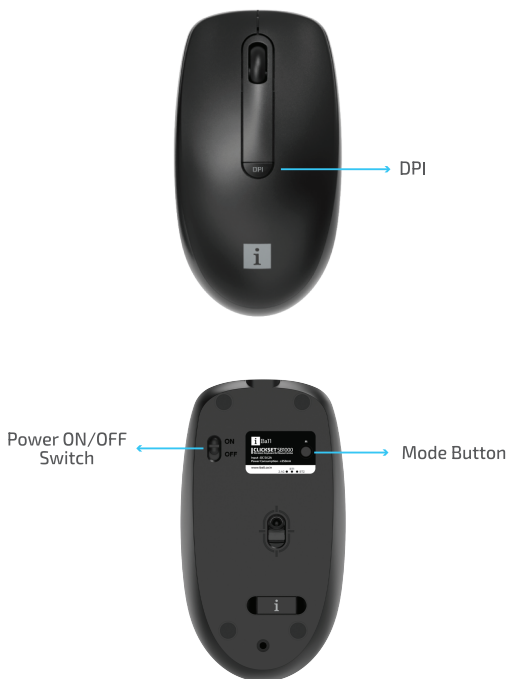

Instructions for Use :

2.4GHz Mode :

Connect the provided Wireless Dongle to your PC or laptop, power on the keyboard and mouse, and switch both to 2.4GHz Mode. They will automatically connect to the Dongle.

BT Pairing :

Keyboard :

1. Press and hold Fn + BT1 or Fn + BT2 to select the desired BT Channel.
2. The selected BT Indicator will blink rapidly in blue to indicate that the keyboard is in pairing mode.
3. Open the BT Settings on your device and search for
 - BT1 - iBall ClickSet K1
 - BT2 - iBall ClickSet K2
4. Select the corresponding BT Name to complete the connection.

Mouse :

1. Press the Mode Button once to Switch between Modes
 - 2.4GHz - Green LED
 - BT1 / BT2 - Blue LED
2. To enter BT Pairing Mode, press and hold the Mode Button for 3 Seconds.
3. Open the BT Settings on your device and search for
 - BT1 - iBall ClickSet M1
 - BT2 - iBall ClickSet M2
4. Select the corresponding BT Name to complete the connection.

Switching Between BT and 2.4GHz Devices :

- The keyboard can connect to 2 BT Devices and 1 Wireless 2.4GHz Device simultaneously, allowing you to switch between up to 3 Connected Devices.

Example :

- BT1 - Smartphone
- BT2 - Laptop or Tablet
- 2.4GHz - PC or Laptop using the supplied

Dongle

- Once all devices are paired, Single-Press the 2.4GHz, BT1, or BT2 key to switch between them. There is no need to pair again or long-press the BT key.

- This allows you to quickly switch between your connected devices whenever required.

Multimedia Functions :


The keyboard supports both Windows and MAC Modes. Press Fn + Win or Fn + Mac to switch between the Two Modes.

All Keys Functions :

Button	Windows	MAC
F1	Brightness Down	Brightness Down
F2	Brightness Up	Brightness Up
F3	Task View	Mission Control
F4	Search	Spotlight
F5	Speech to Text	Dictation
F6	Screen Lock	Screen Lock
F7	Previous track	Previous track
F8	Play / Pause	Play / Pause
F9	Next Track	Next Track
F10	Mute	Mute
F11	Volume Down	Volume Down
F12	Volume Up	Volume Up
Ai	Ai Assist	App Switch

Button	Windows	MAC
Calculator	Calculator	No Function
Fn + WIN	Switch to Windows	Switch to Windows
Fn + MAC	Switch to MAC	Switch to MAC

LED Indicators :

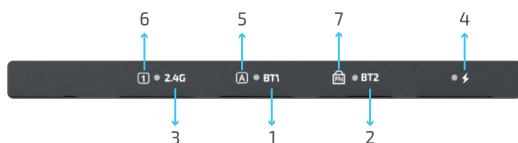

1. BT1
2. BT2
3. RF Mode
4. Charging Indicator / Battery Low
5. Cap Lock
6. Number Lock
7. Function Lock

- When the LED is blinking, it indicates pairing mode :

Green LED - 2.4 GHz Mode

Blue LED - BT1/BT2 Mode

After successful connection, the LED will turn off.

- Lock Indicators :
 - Green LED - Num Lock
 - Blue LED - Caps Lock
 - Green LED - Fn Lock when enabled.
- While charging, the Red LED will glow steadily.



ISO 9001:2015 Certified Company
Since 2001 | www.iball.co.in