

LUMORA 40

SMART PROJECTOR



User Manual

Designed For Excellence.

www.iball.co.in

Thank you for choosing **Lumora 40 Smart Projector**. Please read the user manual carefully before operation and save this user manual for further reference.

NOTE :

- Use the **supplied power cable** and connect the projector to an **AC 100—240 V, 50/60 Hz** power source.
- Do not look directly into the **projector lens** when the projector is turned on.
- Keep the **air vents clear and unobstructed** during use. Place the projector in a well-ventilated area.
- For safe operation and better performance, **turn off the projector after 6 hours of continuous use** and allow it to cool down.
- Keep the projector **away from water, moisture, and other liquids**. Do not place it in areas where water may collect.
- Place the projector on a **stable, flat surface** and avoid enclosed spaces that may restrict airflow.
- Please do not attempt to disassemble this product yourself, as it will result in voiding the warranty. For expert assistance, please contact our support team at 84400 45005 or feedback@iball.co.in

To review our complete warranty terms and conditions, please click the link below

[View Warranty Policy](#)

To find your nearest authorized service center, please click the link below

[Find a Service Center](#)

Features :

- 3750 Lumens
- FHD 1080p Support
- 508cm Screen Size
- Auto Focus & Keystone
- App Support
- 30,000h LED Lifespan
- 90° Tilt
- BT v5.4 | HDMI ARC | USB | Headphone Jack
- 2.4GHz WiFi
- Integrated Speakers
- BT + IR Remote
- Quad Core Processor
- Miracast | iOS Wireless Casting

Specification :


Model	: iBall-LUMORA 40
Screen Size	: 85 - 508cm
Native Resolution	: HD 720p
Max. Supported Resolution	: FHD 1080p
Android version	: 12
Core Processor	: Quad Core Processor
Wi-Fi Connectivity	: 2.4GHz
Bluetooth Version	: v5.4
LED Lifespan	: 30,000h
Brightness	: 3750 Lumens

Dynamic Contrast ratio	: 2000:1
Projection Distance	: 0.9m - 5.4m
Port Interface	: 1 x HDMI ARC 1 x USB 1 x Headphone Out
Video File Format	: AVI MP4 MKV FLV MOV 3G2 MPG VOB SWF TS M2TS
Input Voltage	
Input 1	: DC 36V = 0.8A
Input 2	: DC 12V = 1.2A
Product Dimension	: 14.5 x 14.5 x 16 cm (W x D x H)
Net.Weight	: 770 g


Package Contents :

Projector	: 1 U
Remote Control	: 1 U
Power Adapter	: 1 U
Cleaning Kit	: 1 U
HDMI Cable	: 1 U
QR Code Guide	: 1 U

Product Description :

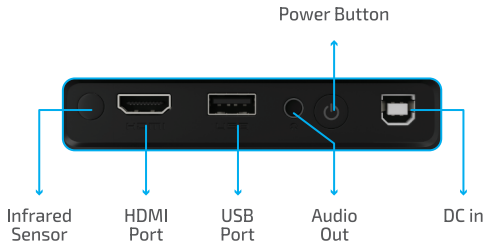

Remote Control :

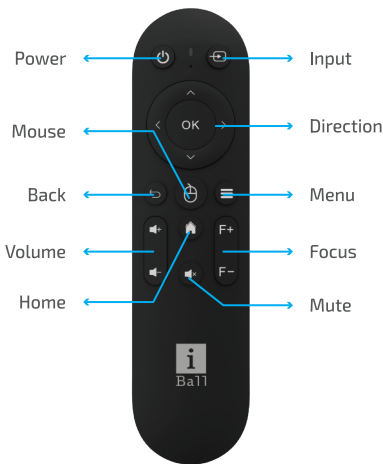

Setting Up the Projector :

- 1. Plug the Power cord into the projector's DC power input. Insert the other end of the power Adapter into a standard wall power socket. Ensure the wall socket is turned on to supply power.

2. Please place the projector on a flat surface to ensure proper projection. Now turn the projector On by pressing the power button either on the panel or on the remote.
3. The projector should be aligned straight to the screen/the place of projection.

Projection Distance & Screen Size :

The recommended projection screen size is 85 - 508cm For the best viewing experience, use the projector in a dark room.



Keystone Adjustment :

1. Go to Settings > Projection settings




2. Select Auto Keystone to automatically adjust the image.
3. You can also enable the following features :
 - Electronic Focus
 - Scaling

- Manual Keystone Correction
- Auto Focus
- Gyro Horizon
- Projection Mode

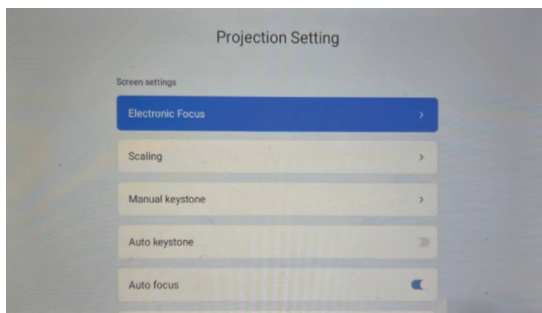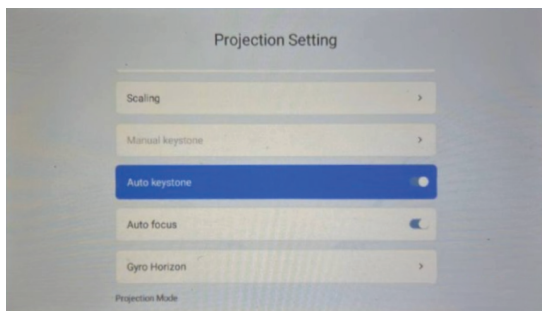

4. For manual adjustment, use the remote control to select Manual Keystone Correction, then adjust the four corners or sides of the projected image until it is properly aligned.

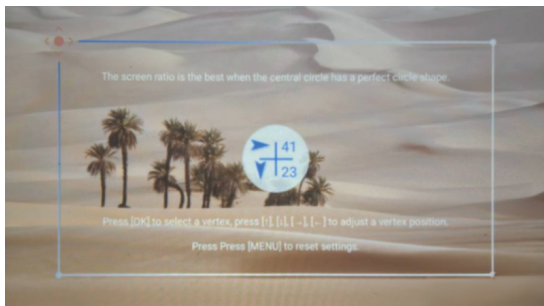

BT Remote Control Setup Instructions:

Follow the instruction mentioned in the below image to activate and setup BT remote with the projector.

Bluetooth Pairing Method

Bluetooth Pairing Operation



Press and hold both the left button ◀ + ▶ and the right button on the remote control. to activate the automatic pairing interface. Release the buttons when the LED starts blinking rapidly. Place the device within 50 cm of the host to pair via Bluetooth. The LED will stop blinking once pairing is successful.



Pairing Method

Projection Mode :

1. Go to Settings > Projection Mode.
2. Select the projection mode that matches your installation:

- Front Desktop – Projector placed on a table in front of the screen.
- Rear Desktop – Projector placed behind the screen.
- Front Ceiling – Projector mounted on the ceiling in front of the screen.
- Back Ceiling – Projector mounted on the ceiling behind the screen.

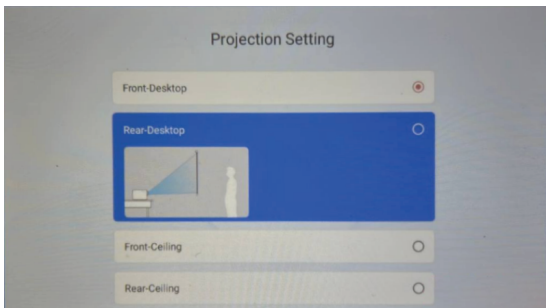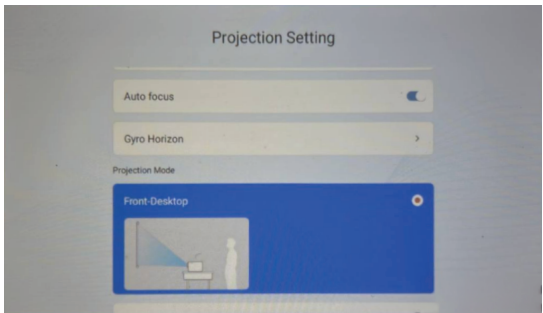

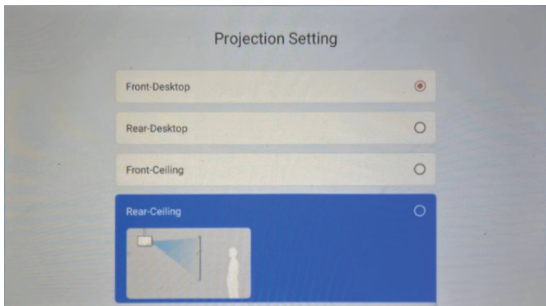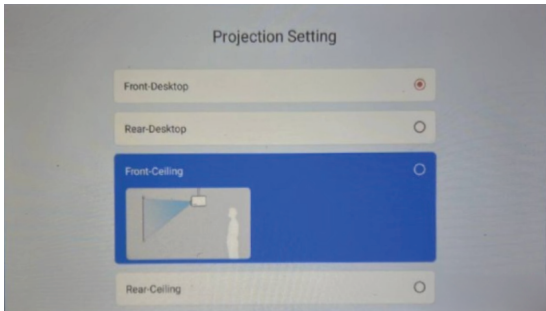


Home Screen :

*Once the projector is turned on, it will display the Home Screen.


The Home Screen provides quick access to:

- Wallpaper
- Setting
- Source Input
- Screen Mirroring
- Applications

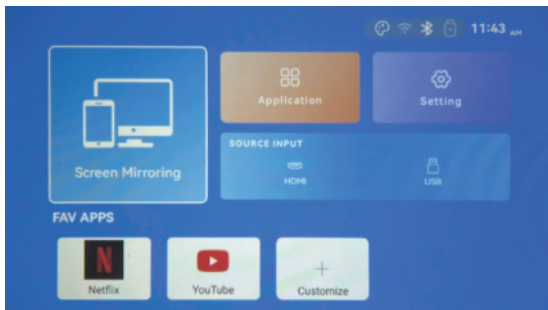


Bluetooth Settings :

1. Go to settings > Bluetooth Settings.
2. Turn the Bluetooth Connection On and search for nearby bluetooth devices.
3. Choose the desired bluetooth device to pair and connect.

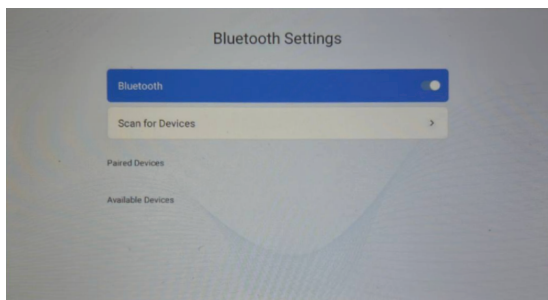


Network Settings :

1. Go to settings> Network settings.
2. WIFI setting, WIFI "ON",
3. Select the Desired network and input password to connect to the network

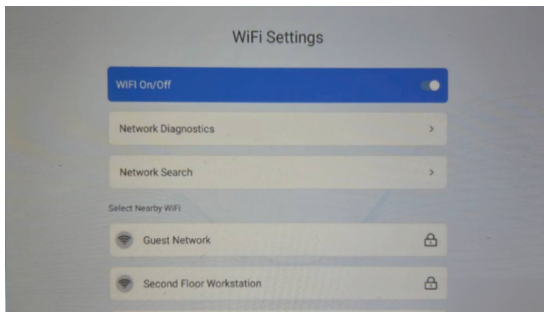

HDMI Connection :

Once the HDMI is connected to the projector, you will need to select the specific signal source as input. After connecting, the content played on the source will be streamed on the projector.

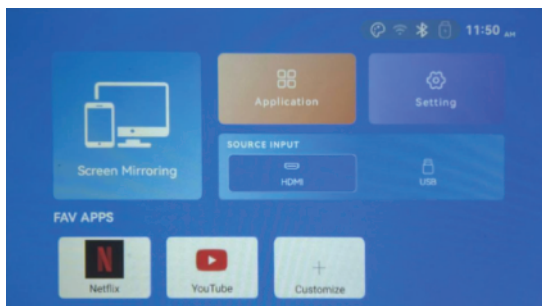

USB Connection :

Plug the USB to the port present at the rear side of the projector. Now navigate to the USB tab present in the homepage.



Screen Mirroring



Application



Setting

SOURCE INPUT



HDMI



USB

FAV APPS



Netflix



YouTube



Customize



ISO 9001:2015 Certified Company
Since 2001 | www.iball.co.in